

Mirror - Interior - Remove and Install (43 636 0)

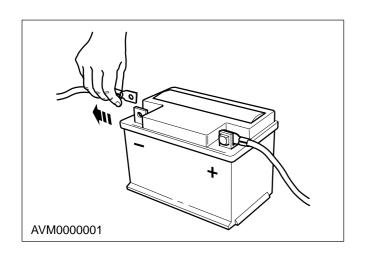


Remove


- 1. Disconnect the battery negative lead.
- 2. Remove the overhead console (refer to Operation Number 43 813 0).



3. Disconnect the multiplug.



4. Unclip and remove the mirror bezel.

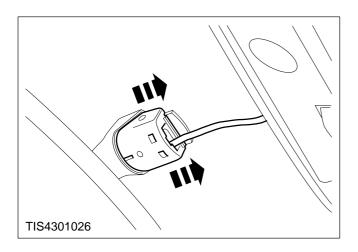

5. Slide the mirror towards the roof to disengage it from its bracket and remove.

Install

6. Refit the components in reverse order.