



Switch – Luggage Compartment Ajar – Remove and Install (33 509 0)

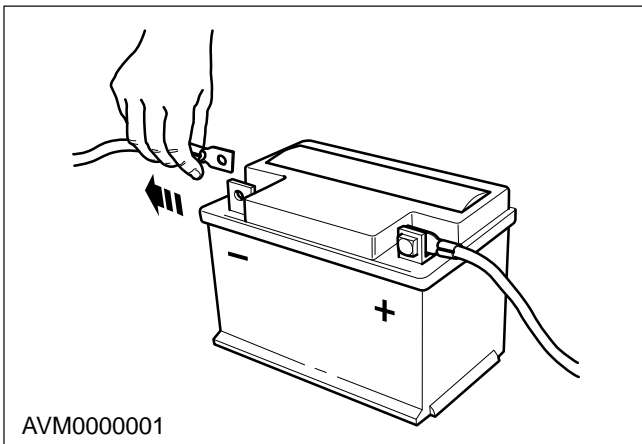

Remove

1. Disconnect the battery negative lead.

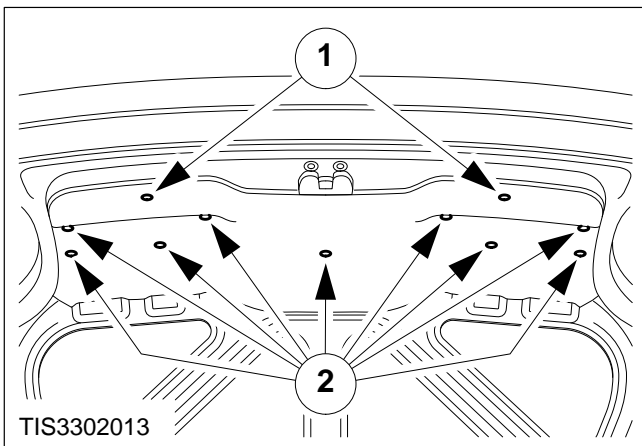

2. Remove the luggage compartment lid trim panel.

1 Remove the two quarter turn fasteners.

2 Prise out the nine push fit fasteners.

3. Detach the luggage compartment lock ajar switch (refer to Operation Number 41 726 0).

Install

4. Refit the components in reverse order.